


HF/VHF Antenna Accessories

BASES

Our HF/VHF Low profile bases are constructed from UV stable Polypropylene and a 5/16"26 TPI nickel plated brass bolt. Our bases are suitable for the DC to 300 MHz frequency range.

<u>MODEL</u>	<u>DESCRIPTION</u>
A-751	Black Base

Australian
Standard
CB Base

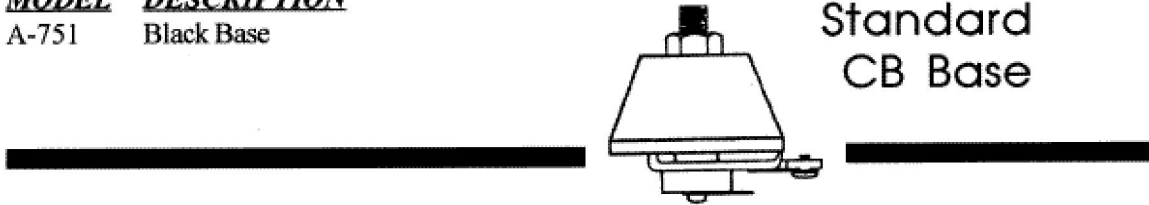

ASSEMBLIES – BASE, LEAD & PLUG

All assemblies are manufactured and fully tested within our factory at Ingleburn, NSW. Cable used is high quality military specification cable with excellent braid coverage. Assemblies are manufactured to standard lengths, although custom made to order lengths are also available upon request. Plugs used on assemblies are the standard UHF (PL259) male plug unless otherwise indicated.

SPECIFICATIONS

VSWR	<1.1 : 1
Mounting	½" round or square hole

<u>MODEL</u>	<u>DESCRIPTION</u>
A-650	Black base, 3.5 Mtrs of RG58C/U Coaxial Cable
A-654	Black base, 3.5 Mtrs of RG58C/U Coaxial Cable + PL259 Plug
A-656	Black base, 3.5 Mtrs of RG58C/U Coaxial Cable + BNC Straight Plug
A-651	Black base, 5.0 Mtrs of RG58C/U Coaxial Cable
A-655	White base, 3.5 Mtrs of RG58C/U Coaxial Cable + PL259 Plug
A-657	White base, 3.5 Mtrs of RG58C/U Coaxial Cable + BNC Straight Plug

