


Product Data

Part Number RO-NF-M
Description N In-Series Male to Female Low PIM Adaptor

Specifications
 Frequency DC to 6 GHz optimized
 Impedance 50 Ohms
 VSWR < 1.25:1
 Intermodulation >150 dBc (2x43dBm)
 Mating Life Min 100 cycles
 Operating Temp -55 to +125 Degrees C
 Body Brass, Silver CuSnZn3
 Weight 35 Grams

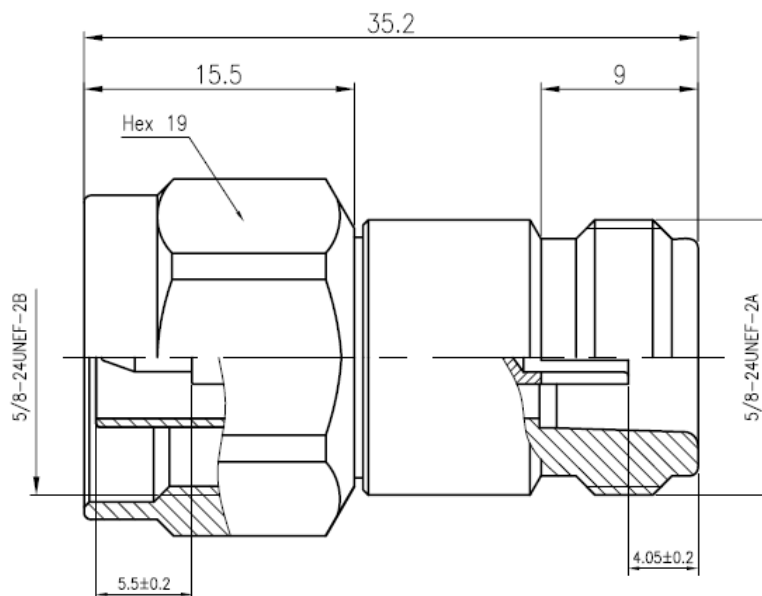

Proudly one of Australia's top 100 Professional & Military Electronics, GPS, RF & Telecommunications companies